

Aluminum Small Body Double Adjustable Remote Gas



Precise & Repeatable

STIFFER
SOFTER



Rod End Rebound Knob

STIFFER
SOFTER



Canister Compression Knob

The adjusters on these shocks are specifically designed to make fast, precise, and repeatable changes. The knobs are 100% o-ring sealed from the elements and easy to grasp, even with muddy, greasy, or gloved hands. The easy-to-feel, spring-loaded detents allow you to quickly **change with a simple click.**

NOTE: WHEN USING THE REMOTE ADJUSTER, WE RECOMMEND THAT YOU SET THE SHOCK TO YOUR DESIRED VALVING BEFORE CONNECTING THE REMOTE ADJUSTER. KNOB ADJUSTER TO REMOTE ADJUSTER RATIO IS 2:1

Midgets / Mini Sprints

All adjustment settings are determined by the number of "clicks" from a lightly closed position (knob turned fully clockwise but not overly tight).

162515 • 162515-1 • 162515-1R

FRONTS & RIGHT REAR
COMPRESSION
REBOUND

| VALVING | COMPRESSION CLICKS | 1" FORCE VALUES | 3" FORCE VALUES |
|---------|--------------------|-----------------|-----------------|
| 5.5 | 0 | 40 | 120 |
| 4.5 | 4 | 28 | 68 |
| 4 | 8 | 21 | 50 |
| 3 | 12 | 20 | 36 |
| 2 | 20 | 18 | 25 |

| VALVING | REBOUND CLICKS | 1" FORCE VALUES | 3" FORCE VALUES |
|---------|----------------|-----------------|-----------------|
| 5 | 0 | 79 | 113 |
| 4.5 | 12 | 45 | 100 |
| 4 | 18 | 20 | 83 |
| 3.5 | 24 | 10 | 56 |
| 1 | 30 | 4 | 25 |

NOTE: VALVING IS DETERMINED BY 3" FORCE VALUES.


162528 • 162528-1 • 162528-1R

LEFT REAR
COMPRESSION
REBOUND

| VALVING | COMPRESSION CLICKS | 1" FORCE VALUES | 3" FORCE VALUES |
|---------|--------------------|-----------------|-----------------|
| 5.5 | 0 | 40 | 120 |
| 4.5 | 4 | 28 | 68 |
| 4 | 8 | 21 | 50 |
| 3 | 12 | 20 | 36 |
| 2 | 20 | 18 | 25 |

| VALVING | REBOUND CLICKS | 1" FORCE VALUES | 3" FORCE VALUES |
|---------|----------------|-----------------|-----------------|
| 8 | 0 | 227 | 270 |
| 7.5 | 12 | 90 | 225 |
| 6 | 18 | 25 | 160 |
| 3.5 | 24 | 10 | 53 |
| 2 | 30 | 68 | 34 |

NOTE: VALVING IS DETERMINED BY 3" FORCE VALUES.

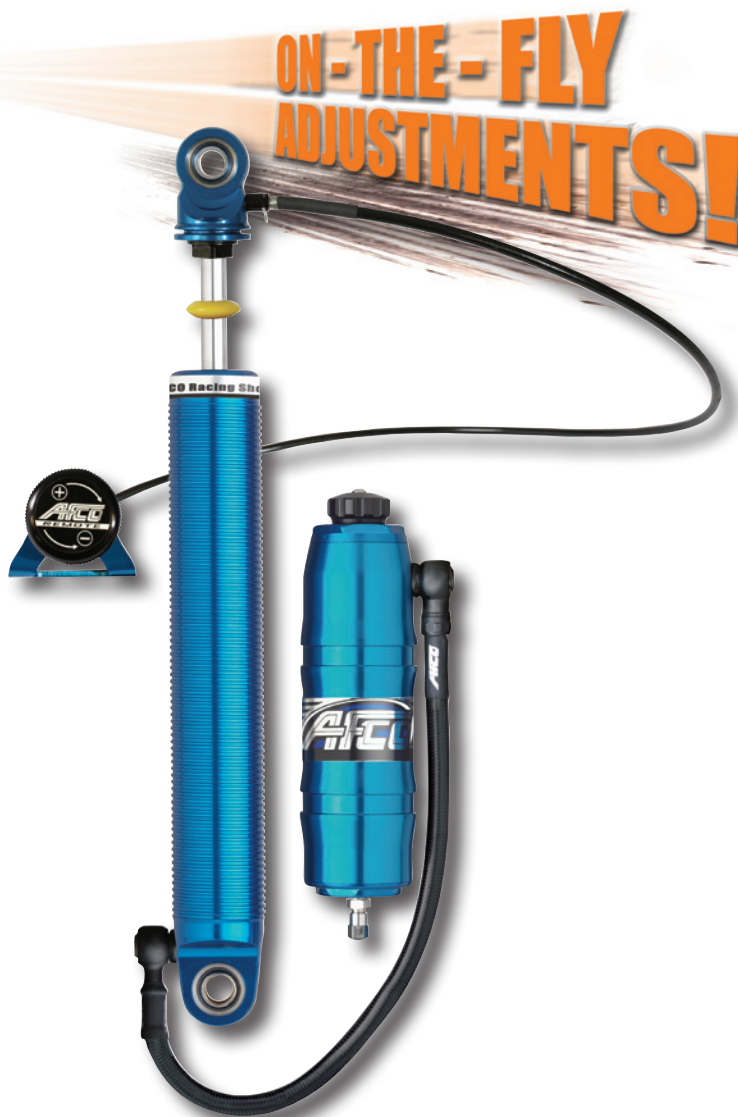

www.AFCOracing.com
800-632-2320

Aluminum Small Body Double Adjustable Remote Gas



Precise & Repeatable



Rod End Rebound Knob



Canister Compression Knob

The adjusters on these shocks are specifically designed to make fast, precise, and repeatable changes. The knobs are 100% o-ring sealed from the elements and easy to grasp, even with muddy, greasy, or gloved hands. The easy-to-feel, spring-loaded detents allow you to quickly **change with a simple click**.

NOTE: WHEN USING THE REMOTE ADJUSTER, WE RECOMMEND THAT YOU SET THE SHOCK TO YOUR DESIRED VALVING BEFORE CONNECTING THE REMOTE ADJUSTER. KNOB ADJUSTER TO REMOTE ADJUSTER RATIO IS 2:1

Sprint Cars (Wing & Non-Wing)

All adjustment settings are determined by the number of "clicks" from a lightly closed position (knob turned fully clockwise but not overly tight).

| 162515 • 162515-1 • 162515-1R | | | | | |
|-------------------------------|-------------|---------|--------------------|-----------------|-----------------|
| FRONTS | COMPRESSION | VALVING | COMPRESSION CLICKS | 1" FORCE VALUES | 3" FORCE VALUES |
| | | 5.5 | 0 | 40 | 120 |
| | | 4.5 | 4 | 28 | 68 |
| | | 4 | 8 | 21 | 50 |
| | | 3 | 12 | 20 | 36 |
| | | 2 | 20 | 18 | 25 |
| REBOUND | COMPRESSION | VALVING | REBOUND CLICKS | 1" FORCE VALUES | 3" FORCE VALUES |
| | | 5 | 0 | 79 | 113 |
| | | 4.5 | 12 | 45 | 100 |
| | | 4 | 18 | 20 | 83 |
| | | 3.5 | 24 | 10 | 56 |
| | | 1 | 30 | 4 | 25 |

NOTE: VALVING IS DETERMINED BY 3" FORCE VALUES.

| 163638 • 163638-1 • 163638-1R | | | | | |
|-------------------------------|-------------|---------|--------------------|-----------------|-----------------|
| RIGHT REAR | COMPRESSION | VALVING | COMPRESSION CLICKS | 1" FORCE VALUES | 3" FORCE VALUES |
| | | 6 | 0 | 121 | 140 |
| | | 5.5 | 8 | 62 | 127 |
| | | 4 | 12 | 31 | 54 |
| | | 3.5 | 20 | 30 | 47 |
| | | <hr/> | | | |
| REBOUND | COMPRESSION | VALVING | REBOUND CLICKS | 1" FORCE VALUES | 3" FORCE VALUES |
| | | 8 | 0 | 202 | 281 |
| | | 7.5 | 12 | 93 | 208 |
| | | 5.5 | 18 | 30 | 142 |
| | | 3 | 30 | 8 | 48 |

NOTE: VALVING IS DETERMINED BY 3" FORCE VALUES.

| 1626210 • 1626210-1 • 1626210-1R | | | | | |
|----------------------------------|-------------|---------|--------------------|-----------------|-----------------|
| LEFT REAR | COMPRESSION | VALVING | COMPRESSION CLICKS | 1" FORCE VALUES | 3" FORCE VALUES |
| | | 6 | 0 | 41 | 135 |
| | | 5.5 | 4 | 30 | 125 |
| | | 4.5 | 8 | 27 | 65 |
| | | 3 | 12 | 21 | 40 |
| | | 2 | 20 | 18 | 29 |
| REBOUND | COMPRESSION | VALVING | REBOUND CLICKS | 1" FORCE VALUES | 3" FORCE VALUES |
| | | 10 | 0 | 314 | 417 |
| | | 9 | 10 | 210 | 365 |
| | | 8.5 | 12 | 90 | 330 |
| | | 6.5 | 18 | 20 | 176 |
| | | 3.5 | 24 | 8 | 53 |
| 2 | 30 | 6 | 34 | | |

NOTE: VALVING IS DETERMINED BY 3" FORCE VALUES.

Get your copy of the NEW AFco Circle Track Catalog & Tech Guide featuring over 30 pages of Shocks & detailed chassis tuning guides!



AFco

800-632-2320

www.AFCOracing.com